


Plugging a new PLP1000 onto an AV500 existing network

AV 500 is an XAV 5602

Setting the workbench

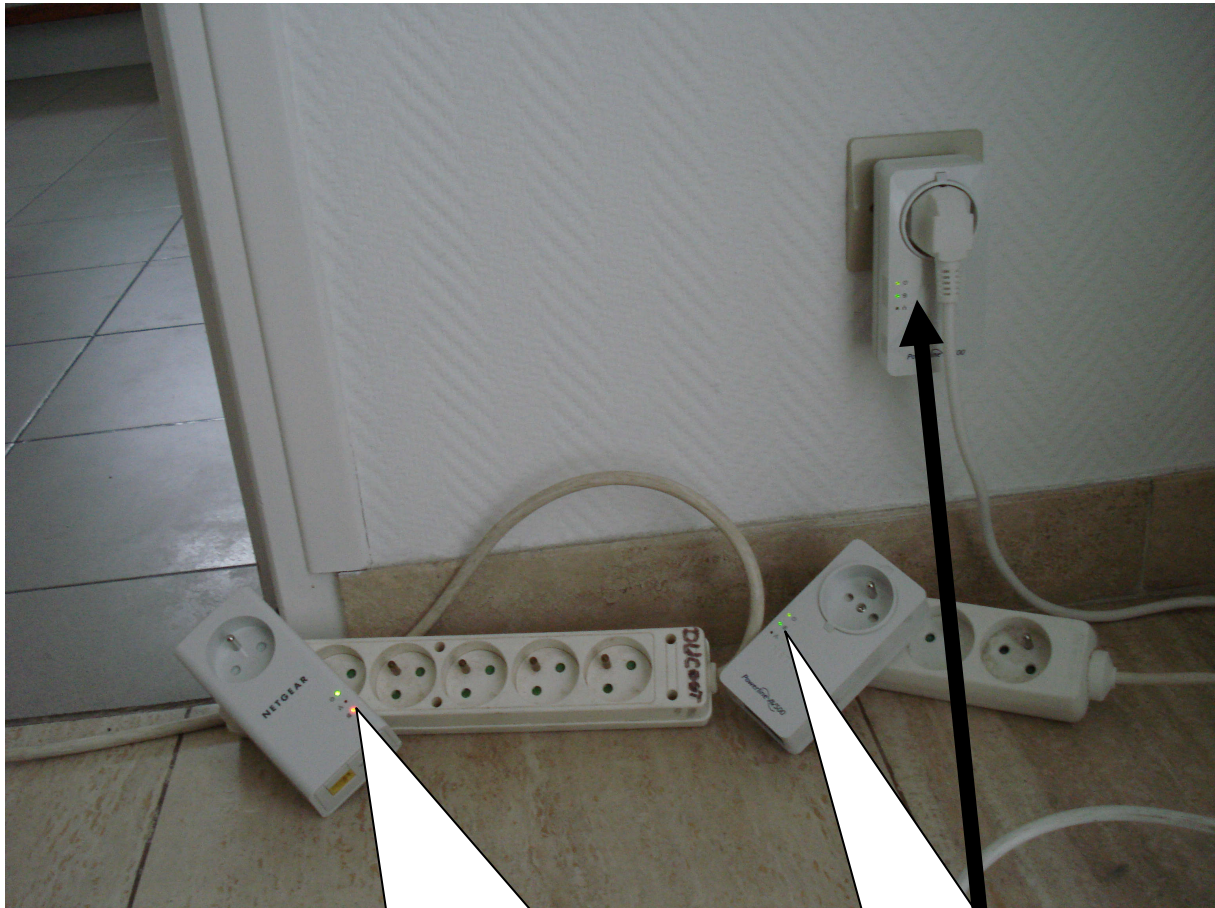

Just after plugging the PLP1000 unit, the "Pick a Plug" LED is solid red.

The AV500 network is working. The two LEDs are solid green.

Continue reading



Depressing the Security button for more than two seconds on the PLP 1000 unit.
The PLP1000 "Power" LED is flashing.
Depressing the "Security" button on the AV500.
Both the PLP and the AV500 "Power" LEDs are flashing.
The AV500 network is always working, the network LED are solid green.

Refer to the MOV04702 video.

Continue reading

When both LED stop flashing the AV500 network LEDs are solid green and the PLP 1000 "Pick a Plug" LED is solid red



Note : when exchanging the PLP1000 with one of the AV500 unit, the result is the same.